

ENDURANT

CYCLE MASTER

Industrial Grade

- Heavy duty
- Deep cycling
- Marine & house bank applications



Vision and Innovation



MASTERING THE DEMANDS OF ALTERNATIVE & STANDBY POWER

 U.S. Manufactured

- Higher Peak Capacity
- Improved Energy Density
- Fortified Plate Construction
- Increased Initial Capacity
- Enhanced Recharge-ability
- Improved Cycle Life

The Hella Endurant CycleMaster is a flooded technology battery specifically designed to withstand the demand of deep discharges and slow recharges. The internal construction includes glass mat and dual insulation deep pocket envelope separators; which protect all sides of the plate to prevent internal shorts. High density oxide increases cycling capacity, providing reliable power.

Hella Endurant CycleMaster is the choice for the customer who demands quality and longevity in a cyclic application.


www.hellaendurant.co.nz

POWER THAT GOES THE DISTANCE

ENDURANT BATTERIES



POWER THAT GOES THE DISTANCE!

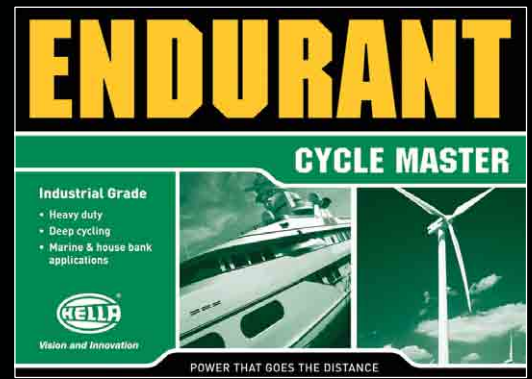

The Hella Endurant CycleMaster is a high integrity Industrial Deep Cycle Battery. The extensive range of sizes and voltages feature thicker plate grids, glass mat separators and hot melt cell group bonding. This robust construction provides good cycle life and resistance to corrosion when subjected to top of charge and float duty charging voltages.

Hella Endurant Batteries - Quality, Performance and Reliability Guaranteed.

FEATURES	BENEFITS
<ul style="list-style-type: none"> • Dual terminals • Anti-Vibration design • Heavy duty plates • Low Maintenance • Handle options 	<ul style="list-style-type: none"> • Easy Application • Minimal damage caused by shock and vibration • Excellent cycling and extended life • Reduced water loss. Can top up water if required • Allows easy fitment

HELLA ENDURANT CycleMaster Industrial Deep Cycle Battery Specifications

Code	Voltage	Assy	Term	Length	Width	Box Height	Total Height	A/Hrs	Kg
12B *	6	L6	STD	225	170	190	215	95	16
R208	6	L6	U/T	260	175	245	285	208	28
R232	6	L6	U/T	260	180	245	285	232	28
R245	6	L6	U/T	260	180	245	300	257	31
IDCJ305	6	L6	D/T	315	180	330	365	305	42
L16/380	6	L6	LUG	315	180	380	450	375	50
L16/420	6	L6	LUG	315	180	380	430	420	54
8V	8	R	U/T	265	180	275	285	170	29
MDC/62N	12	R	STD	240	140	225	230	62	13
IDC27/105	12	R	D/T	320	170	205	235	105	13
IDC31/130	12	R	D/T	330	170	220	240	130	15
R155	12	L6	U/T	345	180	245	280	155	19
IDCJ185	12	L	D/F	395	175	335	375	190	22
MDC24/85	12	R	D/T	275	165	205	240	85	30
MDC27/105	12	R	D/T	320	165	200	240	105	39
MDC31/130	12	R	D/T	330	175	215	235	125	40
MDC8D/240	12	3R (B3)	STD	520	275	205	250	240	54
MDCN150/180 *	12	3R	STD	505	220	210	240	180	58

* Battery not U.S. Manufactured


R155



R232



MDC27/105



MDC8D/240



Hella Endurant supports battery recycling



Dealer: